

► Features

- Isolated waterproof connector: Use industrial grade coarse wire and strictly waterproof plug.
- Flexible installation: 180° rotation installation, dead-zone free lighting design.
- High quality tempered glass: high temperature resistance, transmittance up to 99%.
- Lamp body: precision die casting aviation aluminum, high hardness, fast heat dissipation.


► Applications



► Detailed description


1. Waterproof IP66 Rating.
2. Application: garden, school, square, yard, Residential community.
3. Use high quality toughened glass mask, shock resistance and thermostability.

► Product Dimension

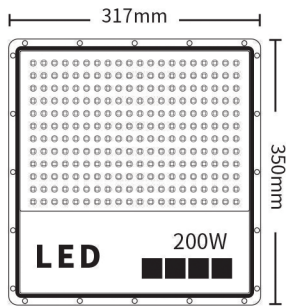


200W
MODEL NUMBER KEOU-FL5-200W

Color	Color Temp
Cold White	6500K
Natural white	4000K
Warm white	3000K

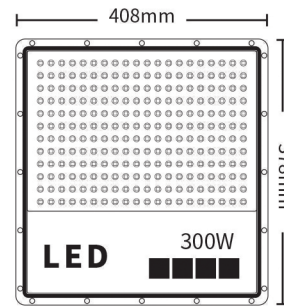


300W
MODEL NUMBER KEOU-FL5-300W

Color	Color Temp
Cold White	6500K
Natural white	4000K
Warm white	3000K

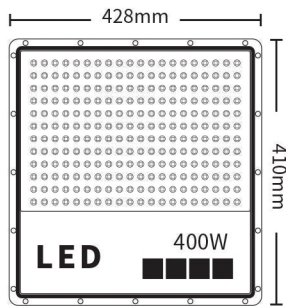

400W
MODEL NUMBER KEOU-FL5-400W

Color	Color Temp
Cold White	6500K
Natural white	4000K
Warm white	3000K

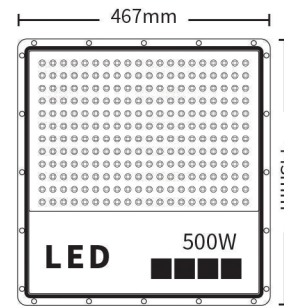


500W
MODEL NUMBER KEOU-FL5-500W

Color	Color Temp
Cold White	6500K
Natural white	4000K
Warm white	3000K


► Specifications

Model Number	Power	Size(mm)	IP	Luminous Flux	Beam Angle	Material
Sp-LD008-200W	200W	327X316X48	66	2400lm	120°	Glass+Aluminium
Sp-LD008-300W	300W	405X335X56	66	3600lm	120°	Glass+Aluminium
Sp-LD008-400W	400W	428X365X56	66	4800lm	120°	Glass+Aluminium
Sp-LD008-500W	500W	467X398X56	66	6000lm	120°	Glass+Aluminium


Installation notes

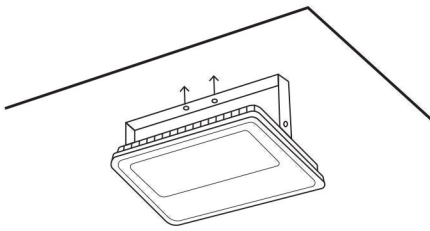


Fixed to the wall

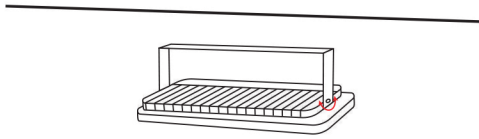


Rotation adjustment angle

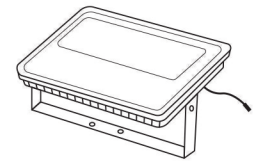


Connect the power cord



Wall mounted




Base mounted

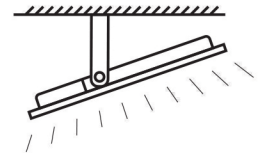


Hang mounted


Packing



Box

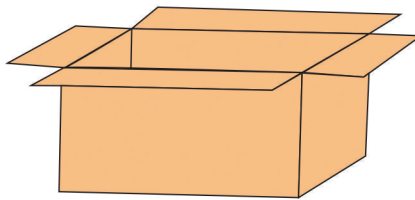

Carton

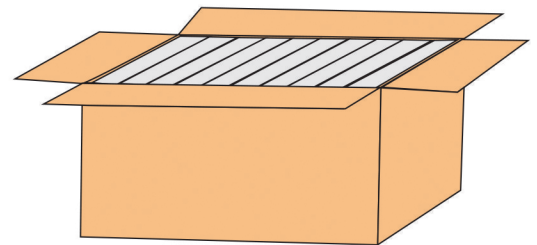

Packing

Model Number	Power	Packing Size(mm)	Carton Size(mm)	QTY/Carton
Sp-FL5-200W	200W	360x345x65mm	370x360x375mm	5
Sp-FL5-300W	300W	435x405x110mm	435x405x110mm	1
Sp-FL5-400W	400W	460x435x110mm	460x435x110mm	1
Sp-FL5-500W	500W	500x465x110mm	500x465x110mm	1